


4" ProTools Downlight (Shallow) Square Recessed

Square Recessed Flush WG-100SPTD-FSOD-W

Power	W	Delivered Lumens			
		2700K	3000K	3500K	4000K
L	11	850	875	922	972
M	15	1187	1220	1286	1356
H	22.5	1612	1657	1747	1842

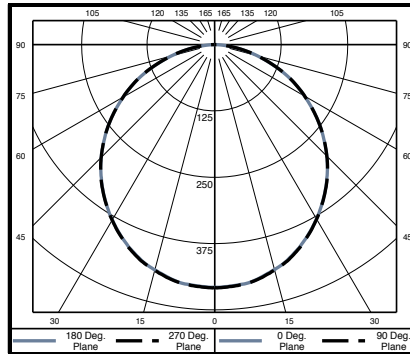


Polar Plot

Cone of Light Tabulation*		
Mounting Height (Ft)	Footcandles at Nadir	Diameter (Ft)
4	28.6	5
6	12.7	7.4
8	7.2	9.9
10	4.6	12.4
12	3.2	14.9
14	2.3	17.4
16	1.8	19.8

*Tabulation uses Mid Power / 935 LED

Square Recessed Cone WG-100SPTD-SRC-RSO-110-W

Power	W	Delivered Lumens			
		2700K	3000K	3500K	4000K
L	11	760	781	824	868
M	15	1060	1090	1149	1212
H	22.5	1440	1481	1561	1646

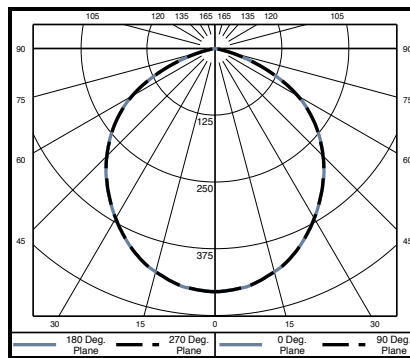


Polar Plot

Cone of Light Tabulation*		
Mounting Height (Ft)	Footcandles at Nadir	Diameter (Ft)
4	28.4	4.8
6	12.6	7.2
8	7.1	9.7
10	4.6	12
12	3.2	14.4
14	2.3	16.8
16	1.8	19.3

*Tabulation uses Mid Power / 935 LED

Square Regressed Pinhole WG-100SPTD-SRP-RSO-110-W

Power	W	Delivered Lumens			
		2700K	3000K	3500K	4000K
L	11	741	762	803	847
M	15	1034	1064	1121	1182
H	22.5	1405	1445	1523	1606

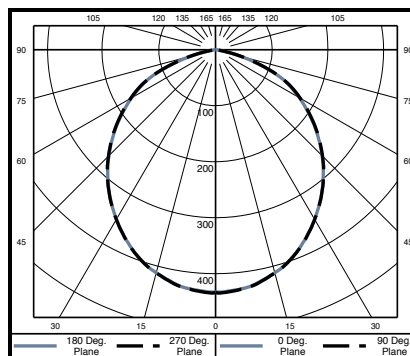

Polar Plot

Cone of Light Tabulation*		
Mounting Height (Ft)	Footcandles at Nadir	Diameter (Ft)
4	27.1	4.8
6	12	7.2
8	6.8	9.6
10	4.3	12
12	3	14.5
14	2.2	16.9
16	1.7	19.3

*Tabulation uses Mid Power / 935 LED