


EVOLUTION

S / M / Vertical

Housing: Pendant light, solid Aluminum housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

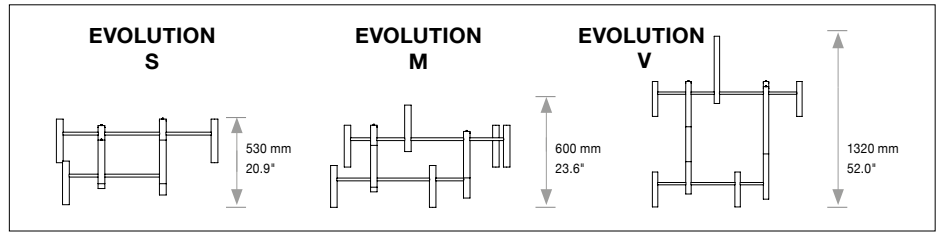

SIZE	Size: L x B x H mm Size: L x W x H Inches	LED Watt	Lumen ¹ direct / indirect	Weight kg / lbs ²	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	EVOLUTION - S 1000 x 1000 x 530 mm 39.4 x 39.4 x 20.9"	47	4300	8.0 / 17.64	1780.	x x.	x x.	x x.	x x.	x x x.	x
	EVOLUTION - M 1258 x 1158 x 600 mm 49.5 x 45.6 x 23.6"	71	6450	12.0 / 26.46	1781.	x x.	x x.	x x.	x x.	x x x.	x
	EVOLUTION - Vertical 1 element 1158 x 1158 x 1320 mm 45.6 x 45.6 x 52.0"	57	5160	16.0 / 35.27	1782.	x x.	x x.	x x.	x x.	x x x.	x
	2 elements vertically suspended* 1158 x 1158 x 2740 mm 45.6 x 45.6 x 107.9"	137	10320 / 2150	32.0 / 70.54	1783.	x x.	x x.	x x.	x x.	x x x.	x
	3 elements vertically suspended* 1158 x 1158 x 4160 mm 45.6 x 45.6 x 163.8"	217	15480 / 4300	48.0 / 105.81	1784.	x x.	x x.	x x.	x x.	x x x.	x
* Minimum distance of 100 mm between elements included.											
Direct LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Warm-white 3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x
		Optional: Extra warm-white 2700 K			x x x.	27.	x x.	x x.	x x.	x x x.	x
		Neutral-white 4000 K			x x x.	40.	x x.	x x.	x x.	x x x.	x
Indirect LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		EVOLUTION S, M, Vertical 1: no indirect light output			x x x.	x x.	x x.	00.	x x.	x x x.	x
		EVOLUTION Vertical 2 and 3 elements: indirect light output same light Color as direct			xxx.	x x.	x x.	---	x x.	x x x.	x
Dimming		Standard: 0 - 10 V			x x x.	x x.	51.	x x.	x x.	x x x.	x
Finish		65 champ. gold anodized brushed			x x x.	x x.	x x.	x x.	65.	x x x.	x
Power supply cable		Z 80 Black			x x x.	x x.	x x.	x x.	x x.	Z80.	x
Mounting version		4-point suspension with external power supply in suspended ceiling		Distance of external power supply unit to light fixture max. 10 m / 394" EVOLUTION-S und EVOLUTION-M: Including steel cable suspension 5 m / 197" and power supply cable 5 m / 197". EVOLUTION-Vertical: Including steel cable suspension 10 m / 394" and power supply	x x x.	x x.	x x.	x x.	x x.	x x x.	A

Power supply units:	
Type / Size mm / inch	L x W x H
DE 1F S / M / Vertical 1 element	363x 143 x 56 mm / 14.2 x 5.6 x 2.2"
DE 2F Vertical 2 elements	363 x 283 x 56 mm / 14.2 x 11.1 x 3.3"
DE 3F Vertical 3 elements	363 x 283 x 56 mm / 14.2 x 11.1 x 3.3"

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

65.
Z80.
A

Complete order number

Ceiling fixation included with mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 3.1" (80mm) round metal cover. Included with mounting version A..1x included per vertical element.

