
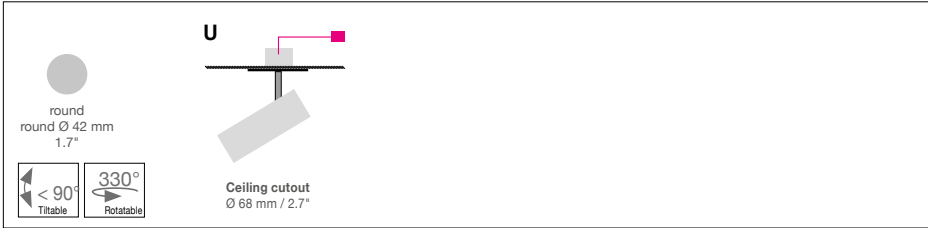


EVOLUTION SPOT M

Housing: Spotlight, solid Aluminum housing, 330° hinge, 24° and 38°
Design: Ulrich Sattler

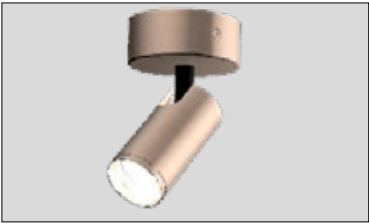

	Size: Ø / L mm	Inches	LED Watt	Lumen ¹	Weight kg/lbs ²	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version
Size	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6.3	659	0.4 / 0.88	24°	1778.	x x .	x x .	x x .	x x .	x x x .	x
	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6.3	659	0.4 / 0.86	38°	1779.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V		Standard: Warm-white	3000 K				x x x .	30.	x x .	x x .	x x .	x x x .	x
		Optional: Neutral-white	4000 K				x x x .	40.	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2700 K				x x x .	27.	x x .	x x .	x x .	x x x .	x
Dimming		Standard: 0 - 10 V					x x x .	x x .	11.	00.	x x .	x x x .	x
Finish		Standard: 66	Optional: 60	62	65	12	x x x .	x x .	x x .	x x .	--	x x x .	x
		bronze anodized brushed	silver anodized brushed	black anodized brushed	champ. gold anodized brushed	white, powder coated, similar to RAL 9003							
Mounting version		Standard:					x x x .	x x .	x x .	x x .	x x .	x x x .	--
		Cover Ø 80 mm / 3.1" Ceiling cutout Ø 68 mm / 2.7" Power supply unit in suspended ceiling.											

<p>Canopy:</p> <p>Type</p> <p>Included with Mounting version</p> <p>Protective rating</p>	<p>DA 125</p> <p>Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling same Color as luminaire</p>	<p>U</p>	<p>IP 40</p>	<p>--- .</p>	<p>--- .</p>	<p>--- .</p>	<p>00.</p>	<p>--- .</p>	<p>000.</p>	<p>--- .</p>
				<p>Complete order number</p>						
<p>Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz</p>				<p>Remote driver required ordered separately:</p> <p>Type / Size mm / inch L x W x H</p> <p>0-10V: ECO30W-500 13.25" x 5" x 2.25"</p>						