



ProTools 60 Linear Direct-Indirect Wall – Mullion Mount

INSIDE CORNER (PI)


WG-60PTLDI-SW-PI-...-RML

OUTSIDE CORNER (PO)






WG-60PTLDI-SW-PO-...-RML



Direction of light can be both up and/or down, it depends on the item



Direction of light can be both up and/or down, it depends on the item





INSIDE CORNER (PI)


WG-60PTLDI-SW-PI-...-ROL

OUTSIDE CORNER (PO)






WG-60PTLDI-SW-PO-...-ROL



Direction of light can be both up and/or down, it depends on the item




Direction of light can be both up and/or down, it depends on the item



ProTools 60 Linear Direct-Indirect Wall – Mullion Mount


INSIDE CORNER (PI)

WG-60PTLDI-SW-PI-...-RLW/RLB



TOP VIEW


SECTION



Direction of light can be both up and/or down, it depends on the item



BOTTOM VIEW




Direction of light can be both up and/or down, it depends on the item


OUTSIDE CORNER (PO)

WG-60PTLDI-SW-PO-...-RLW/RLB


SECTION




Direction of light can be both up and/or down, it depends on the item



TOP VIEW




BOTTOM VIEW



Direction of light can be both up and/or down, it depends on the item

INSIDE CORNER (PI)

WG-60PTLDI-SW-PI-...-REO




TOP VIEW


SECTION



Direction of light can be both up and/or down, it depends on the item



BOTTOM VIEW




Direction of light can be both up and/or down, it depends on the item


OUTSIDE CORNER (PO)

WG-60PTLDI-SW-PO-...-REO


SECTION




Direction of light can be both up and/or down, it depends on the item



TOP VIEW



BOTTOM VIEW




Direction of light can be both up and/or down, it depends on the item

ProTools 60 Linear Direct-Indirect Wall – Mullion Mount




CORNER + STRAIGHT RUN CONNECTIONS

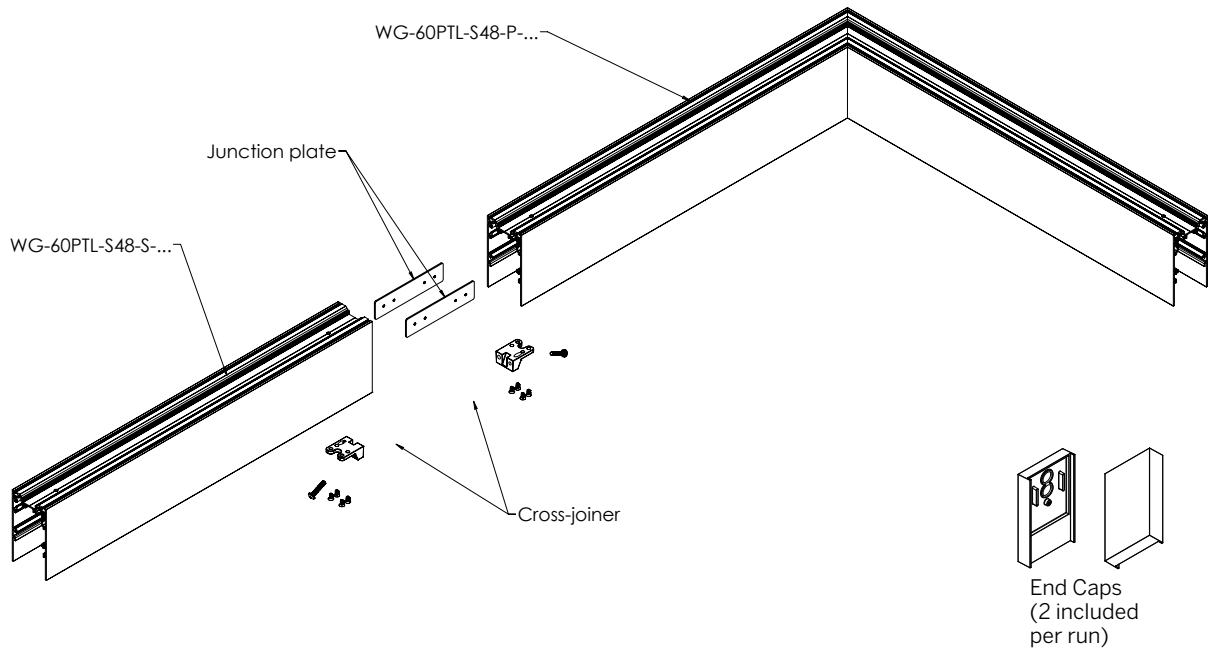


ProTools 60 Linear Direct-Indirect Wall – Mullion Mount


PROFILE DIMENSIONS

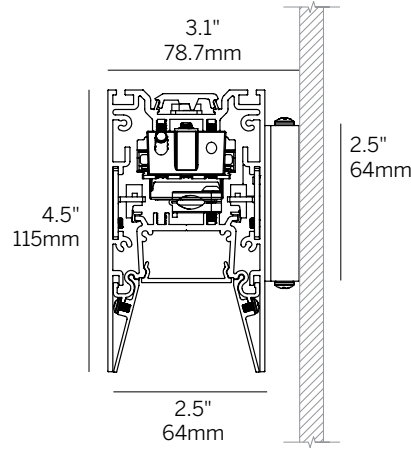


LENS / LOUVER DIMENSIONS




Recessed Micro-prismatic Lens (RML)



Recessed Louver (RLW, RLB)



Regressed Opal Lens (ROL)




Recessed Elliptical Optic (REO)

ProTools 60 Linear Direct-Indirect Wall – Mullion Mount


FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

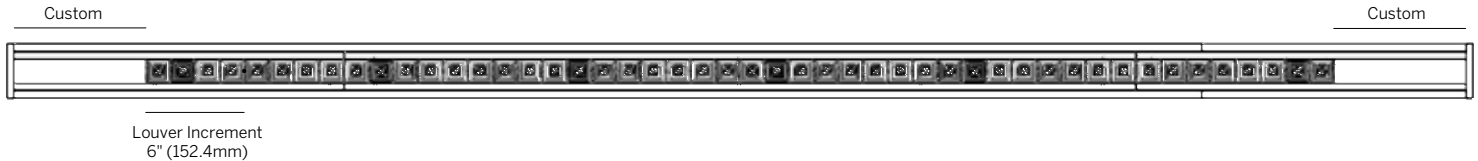

FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

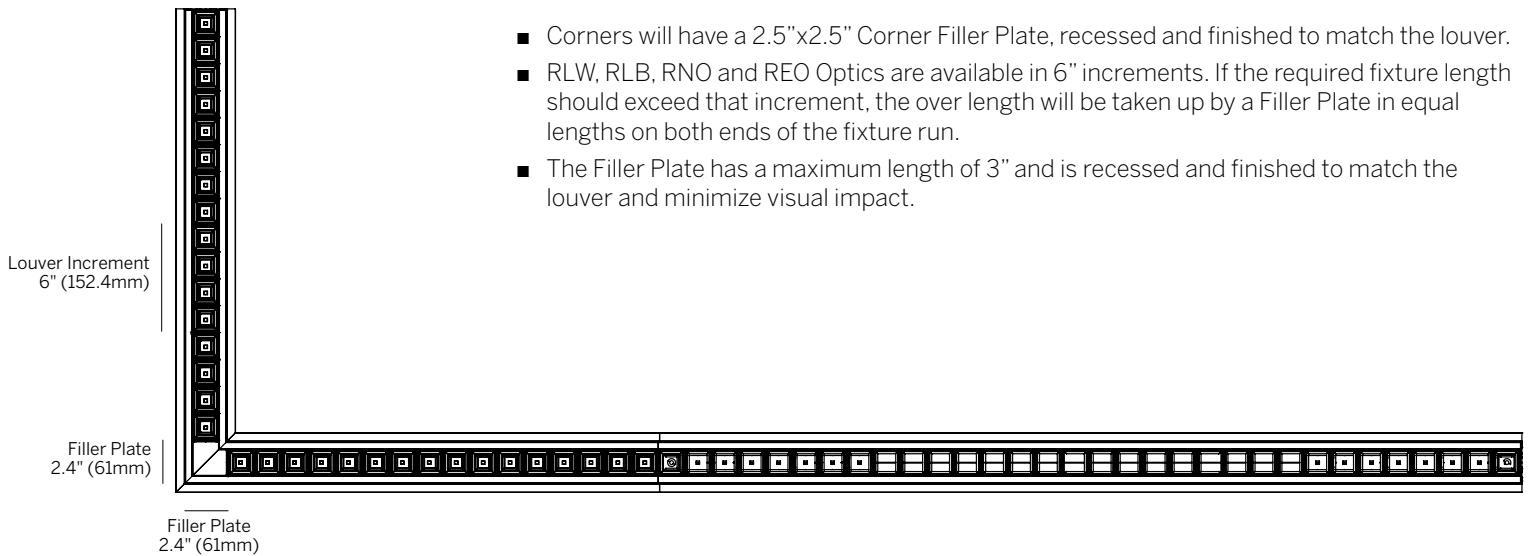

ProTools 60 Linear Direct-Indirect Wall – Mullion Mount

FILLER PLATE MULTI-CORNER / LOUVER

- Corners will have a 2.4"x2.4" Corner Filler Plate recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

