
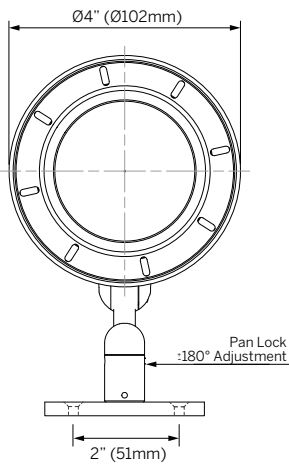


ZTA.100 Surface

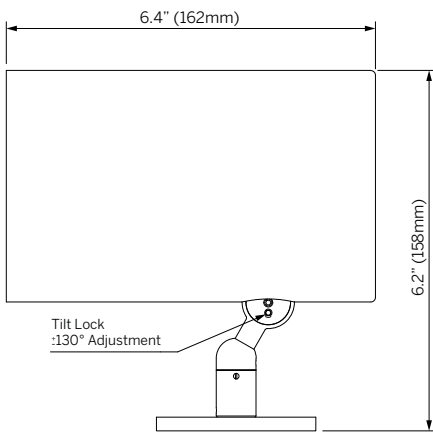

Luminaire

- Interior rated spot light with zoomable lens or fixed focus optics.
- Surface mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting

- SM = Surface Mounted

Power¹

- 36 = 36W (3850lm initial at 1050mA, 37Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- N = Narrow (24°)
- M = Medium (25°)
- F = Flood (31°)
- WF = Wide Flood (48°)
- EWF = Extra Wide Flood (65°)

Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Accessories³

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

Remote Driver⁴

- ECO30W-500 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-500 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures (1 per output)
- SOLO100W-500 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures (1 per output)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
 2. See photometric data sheet for delivered lumens.
 3. Holds up to two accessories.
 4. See driver information for details.

Ordering Information

Model	Mounting	Power ¹	CRI/CCT ²	Optic	Finish	Accessories ³	+	Driver ⁴
MS-ZTA100S	SM	36						
MS-ZTA100S	SM	36	927 930 935 940	N M F WF EWF	W BL CF	CL DL HCL SOL SHS SOS		ECO30W-500 SOLO50W-500 SOLO100W-500

