


# ZTA.70 LV Stucchi Track +Zoom

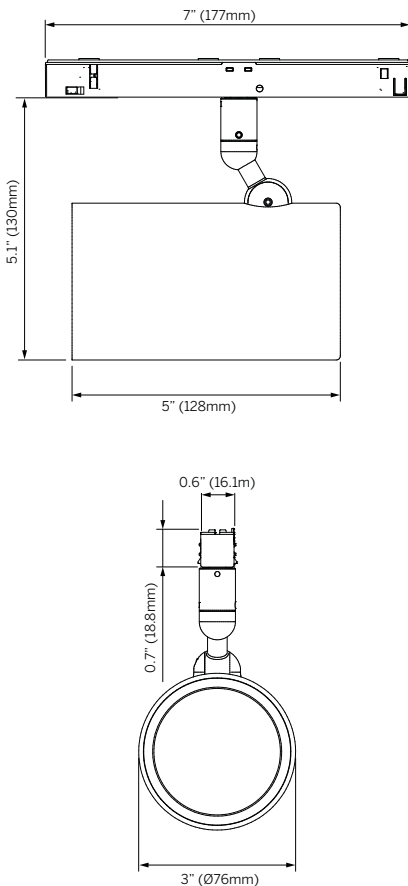

### Luminaire

- Interior rated low voltage track spot light with zoomable lens or fixed focus
- Track mounted (Stucchi Multisystem Evo - Low Voltage Track).
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.
- Fixture includes 0-10V dimming, driver remote.

### Mounting<sup>1</sup>

- ST = Stucchi Multisystem Evo - Low Voltage Track

### Power<sup>2</sup>

- 8 = 8W (798lm initial at 250mA, 34.1Vf)
- 12 = 12W (1513lm initial at 350mA, 36.9Vf)
- 24 = 24W (2745lm initial at 700mA, 36.7Vf)

### CCT (95+ CRI)<sup>3</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

### Optic

- VN = Very Narrow (11°), 8W Only
- Z1 = Zoom 1 (17° - 41°), 12W Only
- Z2 = Zoom 2 (23° - 39°), 24W Only
- N = Narrow (15°), 12W Only
- M = Medium (25°), 24W Only
- F1 = Flood 1 (32°), 24W Only
- F2 = Flood 2 (46°), 24W Only
- WF = Wide Flood (61°), 24W Only
- WW = Wall Wash (81° x 41°), 24W Only

### Finish (fixture and track adapter) (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

### Options<sup>4,5</sup>

- SCS = Slash Cut Snoot
- SNT = Straight Snoot
- BD = Barn Doors

### Accessories<sup>4</sup>

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

### Power Supply<sup>6</sup>

- IL-DB12-LED-48002-UNV = Dry location enclosure 13.25"x 5"x 2.25" with CV Driver, 96W, 48VDC, 120/277V, Class 2

### Controls (Dimming)

- 010 = 0-10V
- DL = DALI
- W = Wireless (Casambi or Xicato)

- Order track separately. See Stucchi LV Track data sheet for details.
- Wattage shown is for LED only, system wattage varies depending on driver selected.
- See photometric data sheet for delivered lumens.
- Holds one option or accessory. See options on page 5 and accessories on page 6 for details.
- Outside same finish as fixture, inside matte black.
- Do not load driver beyond 76.8W. See driver information for details. Additional drivers available. contact factory.

### Ordering Information

Model	Mounting <sup>1</sup>	Power <sup>2</sup>	CRI/CCT <sup>3</sup>	Optic	Finish	Options <sup>4,5</sup>	Accessories <sup>4</sup>	+	Driver <sup>6</sup>	Controls
MS-ZTA70LV	ST	8	927	VN	W	SCS	CL		IL-DB12-LED-48002-UNV	010 DL W
		12	930	N	BL	SNT	DL			
		24	935 940	M F1 F2 WF WW	CF	HCL SOL SHS SOS				
MS-ZTA70LVZ (Zoom)		12		Z1						
		24		Z2						

