


ZTA.70.Pendant

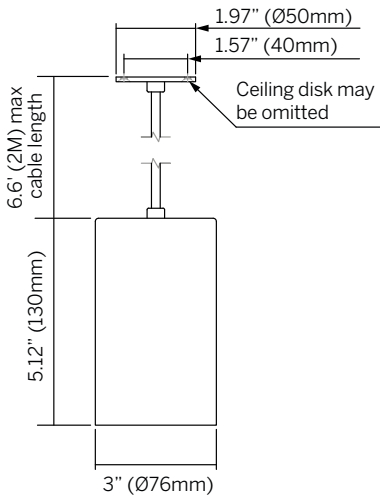

Luminaire

- Interior rated suspended Pendant. Designed for the circular economy. Suited to a multitude of applications from museum and gallery, retail, heritage, private residential and commercial.
- Suspension mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting

- S = Suspension cable. field adjustable 6.6" (2M) max length, black

Power¹

- 8 = 8W (798lm initial at 250mA, 34.1Vf)
- 12 = 12W (1513lm initial at 350mA, 36.9Vf)
- 24 = 24W (2745lm initial at 700mA, 36.7Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- VN = Very Narrow (11°), 8W Only
- N = Narrow (15°), 12W Only
- M1 = Medium 1 (22°), 24W Only
- M2 = Medium 2 (25°), 24W Only
- F1 = Flood 1 (32°), 24W Only
- F2 = Flood 2 (46°), 24W Only
- WF = Wide Flood (61°), 24W Only

Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Accessories³

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

Remote Driver⁴

- ECO30W-500 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-500 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures (1 per output)
- SOLO100W-500 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures (1 per output)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. Holds up to two accessories. See page 5 for details.
4. See driver information for details.

Ordering Information

Model	Mounting	Power ¹	CRI/CCT ²	Optic	Finish	Accessories ³	+	Driver ⁴
MS-ZTA70P	S							
MS-ZTA70P	S	8	927	VN	W	CL	+	ECO30W-500 SOLO50W-500 SOLO100W-500
		12	930	N	BL	DL		
		24	935 940	M1 M2 F1 F2 WF	CF	HCL SOL SHS SOS		

