
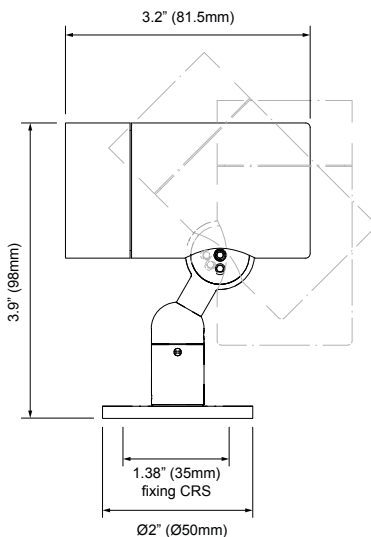


ZTA.35 Surface +Zoom

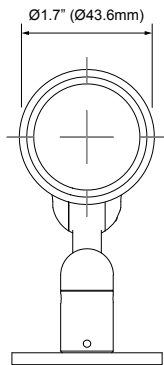

Luminaire

- Interior rated spot light with zoomable lens or fixed focus optics.
- Surface, stem or pole clamp mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting

- SM = Surface Mounted
- ST = Stem Mounted¹
- PC = Pole Clamp (clamp only, contact us for custom pole options)¹
- FX = Flex Mounted (180° adjustable surface mounted, swivel arm)¹

Power²

- 4 = 4W (385lm initial at 450mA, 9.4Vf)
- 8 = 8W (798lm initial at 250mA, 34.1Vf)

CCT (95+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- Z = Zoom (21.6° - 44.9°), 8W Only
- N1 = Narrow 1 (13.6°), 4W Only
- N2 = Narrow 2 (17.8°), 8W Only
- M = Medium (23°), 8W Only
- F = Flood (34.6°), 8W Only
- WF = Wide Flood (54.5°), 8W Only

Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black
- CF = Custom finish, specify RAL

Accessories⁴

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

Remote Driver⁵

- ECO30W-500 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-500 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures (1 per output)
- SOLO100W-500 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures (1 per output)

1. See page 5 for details.
2. Wattage shown is for LED only, system wattage varies depending on driver selected.
3. See photometric data sheet for delivered lumens.
4. Holds up to two accessories. See page 6 for details.
5. See driver information for details.

Ordering Information

Model	Mounting	Power ²	CRI/CCT ³	Optic	Finish	Accessories ⁴	+	Driver ⁵
MS-ZTA35S	SM ST ¹ PC ¹ FX ¹	4	927	VN1	W	CL		ECO30W-500 SOLO50W-500 SOLO100W-500
		8	930 935 940	VN2 M F WF	BL CF	DL HCL SOL SHS SOS		
		8		Z				
MS-ZTA35SZ (Zoom)		8		Z				

