



General: Beriel is part of our Crystals collection. A series of small spot lights with crystal diffusers made in different shapes, some clear and some diffused but all of them with the goal to create a unique effect in the space.

Fixture Body: Brass (Chromium Plated).

Diffuser: Clear Glass.

Trim: Bezel.

Mounting: Semi-Recessed ceiling.

Dimensions/Weight: 0.8" (0.13 lbs)

Driver: Remote, DMX 120-277V Dimmable.

Operation: Constant Current (CC).

Wattages: 2.1W (0.8")

Cable: Fixture comes with 0.39' of power cable.

IP rating: IP20. Fixture is protected against solid objects greater than 0.04". Not suitable for Outdoor applications or any contact with water.

ETL Certification: ETL, dry location


Optics: Fixed, General distribution.

Color temperatures: 2700K – 3000K – 4000K – 5000K.

CRI: 90+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

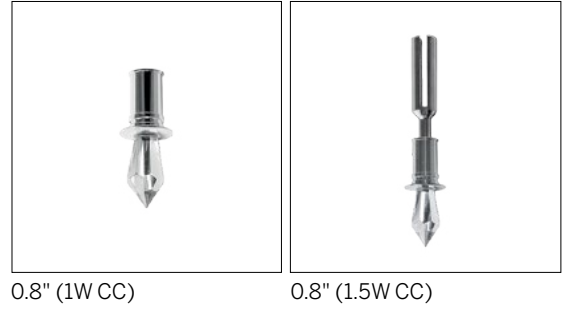

0.8" (1W CC)

0.8" (1.5W CC)


Delivered Lumens*	0.8" [1 CC]	0.8" [1.5 CC]
GE	96	96

*Values shown for 3000K

Ordering Information							(Required)		
Product	Trim/Film	Type	Diameter	Wattage/Operation	Color Temp	Optic	+	Housing ¹	Driver ¹
BRL = Beriel	SFCH = Semi-Flush Chrome	D = Diamond Shaped Crystal	08 = 0.8"	1 CC = 1W / Constant Current (350mA) 1.5 CC = 1.5W / Constant Current (500mA)	27 = 2700K 30 = 3000K 40 = 4000K 50 = 5000K	GE = General distribution		E84335 (1W) E84917 (1.5W)	ECO30W-XXX SOLO50W-XXX SOLO100W-XXX

¹ See page 2

0.8" 1W CC



Housing

E84335
Recessed Housing



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350

0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures


SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures

0.8" 1.5W CC

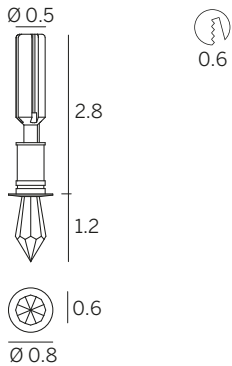

Housing

E84917
Recessed Housing



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-500

0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures

SOLO50W-500

0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-500

0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures