
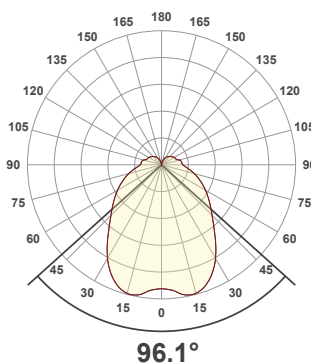

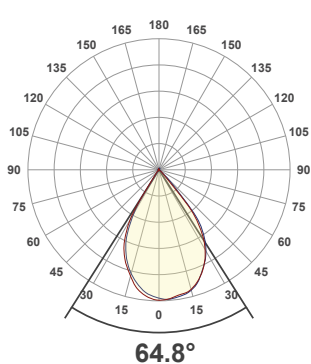


## Photometry

Fitting	Polar diagram	LED	Supply	Power	Delivered output
 <p>Frosted Satin Acrylic Cylinder</p>	 <p>96.1°</p>	80 CRI, 3000K	Constant Current 700mA	16.5W	1798lm
		80 CRI, 3000K	48V Constant Voltage	12.6W	1118lm

Fitting	Polar diagram	LED	Supply	Power	Delivered output
 <p>Glare Free</p>	 <p>64.8°</p>	80 CRI, 3000K	Constant Current 700mA	16.5W	1974lm
		80 CRI, 3000K	48V Constant Voltage	12.6W	1316lm