

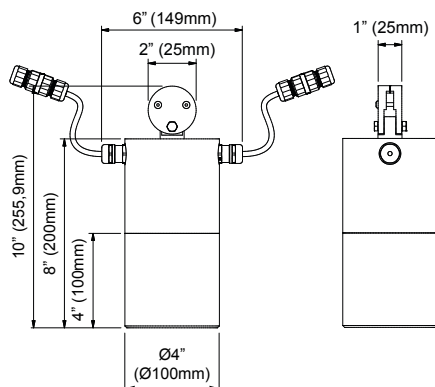


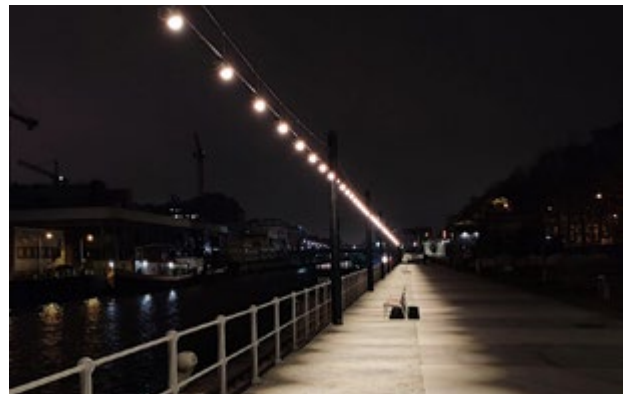

Frosted Satin Acrylic Cylinder

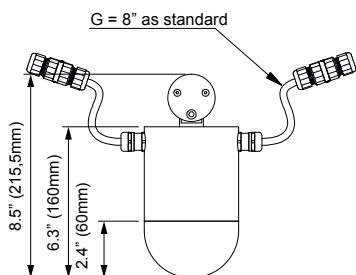

Low Glare

Luminaire

- IP66 rated miniature catenary mounted luminaire.
- Suitable for lighting outdoor public spaces, pathways and more intimate hospitality and high end residential applications.
- Polished acrylic globe with internally frosted diffuser (GCSC).
- Dark sky version has no upward light for the dome version (GCLG).
- Suitable for 0.3" (8mm) stainless steel catenary cable suspensions secured via integrated top cap and clamp system.¹
- Precision machined from 70 - 90% recycled aluminum.
- LED 95+ CRI standard, 80 CRI Optional, multiple CCTs available.

Mounting¹

- CAT = Suspended catenary system

Power²

- 13-CC = 12.9W, Constant Current, 700mA (1400lm)
- 17-CC = 16.5W, Constant Current, 700mA (2100lm)
- 13-DC = 12.6W, Constant Voltage, 48V DC (1300lm)
- 17-DC = 17.2, Constant Voltage, 48V DC (1300lm)

CRI

- 95 = 95+ CRI
- 80 = 80 CRI

CCT³

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Optic

- 65 = 65° (Frosted Satin Acrylic Cylinder)
- 96 = 96° (Low Glare)

Finish

- CA = Clear Anodized
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Remote Driver⁴

- ECO30W-700 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-700 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures
- SOLO100W-700 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
- IL-DB12-LED-48002-UNV = Dry location enclosure 13.25"x 5"x 2.25" with CV Driver, 96W, 48VDC, 120/277V, Class 2

1. See page 5 for system specification.
2. Wattage shown is for LED only, system wattage varies depending on driver selected.
3. See photometric data sheet for delivered lumens.
4. See driver information for details.

Ordering Information

	CAT							
Model	Mounting ¹	Power ²	CRI	CCT ³	Optic	Finish	+	Driver ⁴
MS-GCSC Frosted Satin Acrylic Cylinder	CAT	13-CC 17-CC 13-CV 17-CV	95 80	27 30 35 40	96	CA BL CF		ECO30W-700 SOLO50W-700 SOLO100W-700 IL-DB12-LED- 48002-UNV
MS-GCLG Low Glare					65			

