


Wire Mounted

Mounted to Ø8mm catenary wire using a locking hinge mechanism.
Accepts many custom (recycled and recyclable) acrylic fronts, optic, lenses and even patterned shades.

Suspension clamp for Ø8mm (Ø.3") catenary suspension wire (supplied by others).

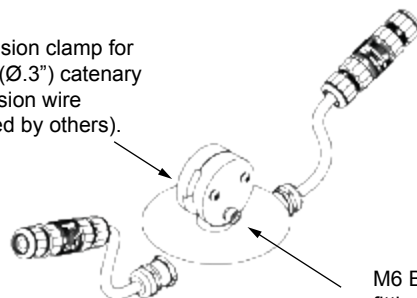


M6 Bolt to allow fitting to swivel

Ref: G-CAT SC


Wiring

Constant Current (remote LED driver) for DALI, 1-10V or Mains

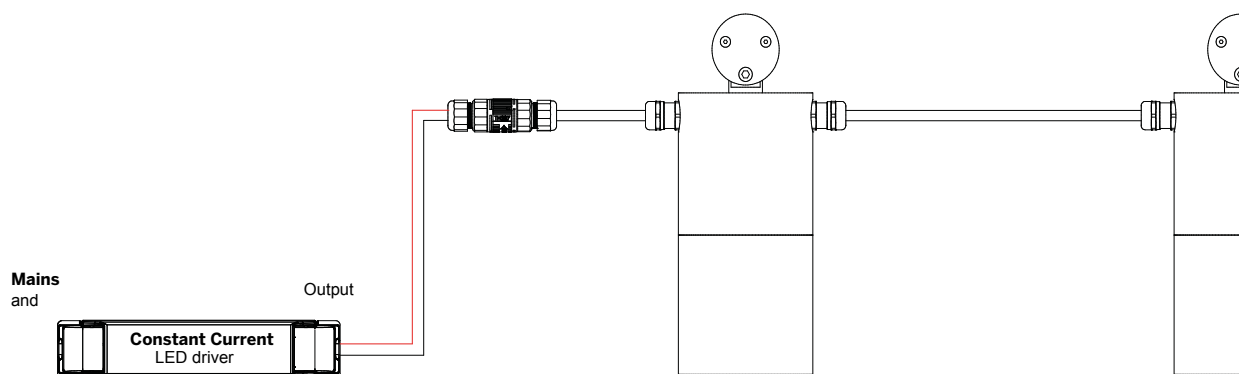

Note that while constant current light sources can be wired in series, the number of fittings is limited by the forward voltage and wattage of the LED

Constant Voltage for 1-10V

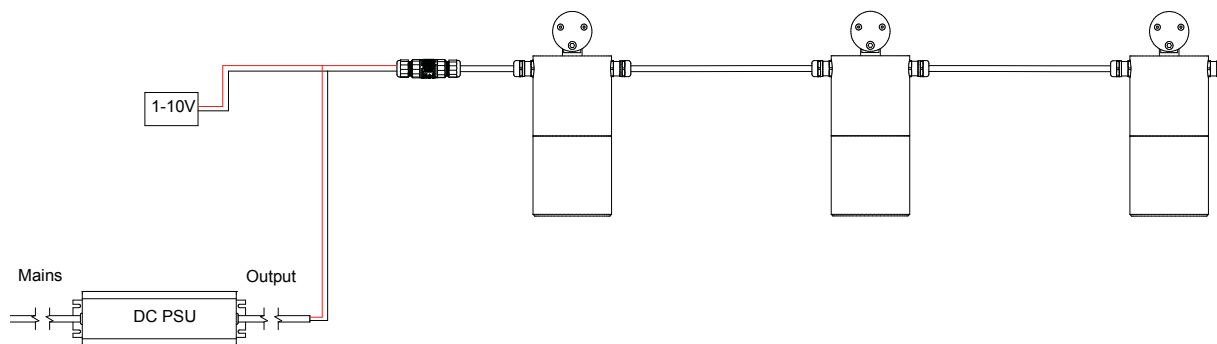

Note that the maximum number of fittings allowed is defined by the output of the power supply.