




Clear sandblasted diffuser (CS)




Opal sandblasted diffuser (OP)




Photographer Jackie Chan



Ø2.4" (Ø61mm)

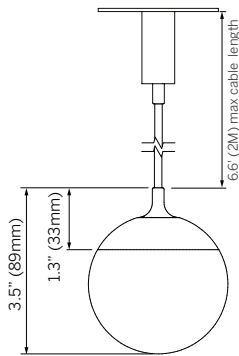

Ø2.9" (Ø73.7mm)

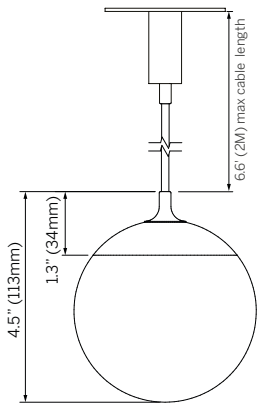

Ø3.9" (Ø99.1mm)

Luminaire

- Decorative pendant for stand alone use or integration in a chandelier.
- Interior rated suspended globe with 70% encapsulated recycled acrylic waste. Available with clear or opal binder.
- Suspension mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Size

- 24 = Ø2.4" (Ø61mm)
- 30 = Ø2.9" Ø73.7mm)
- 40 = Ø3.9" (Ø99.1mm)

Mounting

- S = Suspension cable. field adjustable 6.6' (2M) max length, black

Canopy

- 2 = 2" dia. surface mount
- 3 = 2.8" dia. surface mount
- 5 = 5" dia. for 4" j-box

Power¹

- 2 = 2W (181lm initial at 700mA, 2.9Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Diffuser

- CS = Clear sandblasted (70% recycled acrylic, sandblasted)
- OP = Opal (70% recycled acrylic with opal additive, sandblasted)

Finish (metal)

- CA = Clear Anodized
- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Canopy Finish


- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Remote Driver³

- ECO30W-700 = 0-10V EldoLED ECOdrive 30W for 1-10 fixtures
- SOLO50W-700 = 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures
- SOLO100W-700 = 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.

Canopy

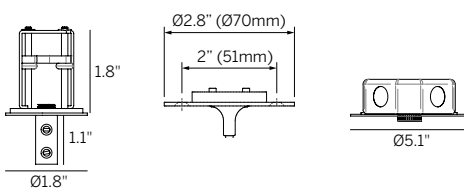

2" dia

3" dia

5" dia for 4" j-box

Ordering Information

Model	Size	Mounting	Canopy	Power ¹	CRI/CCT ²	Diffuser	Finish	Canopy Finish	+	Driver ³
MS-ORB	24 30 40	S	2 3 5	2	927 930 935 940	CS OP	CA W BL CF	CA W BL CF		ECO30W-700 SOLO50W-700 SOLO100W-700

