


ZTA.50 G-Stick

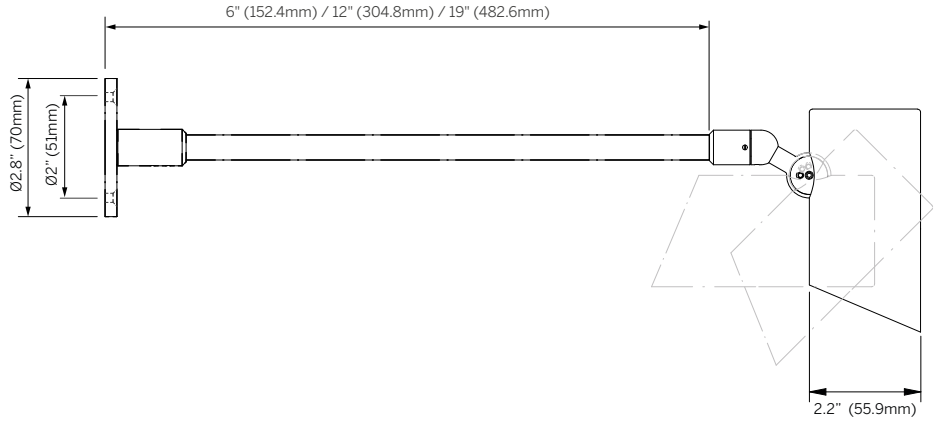

Luminaire

- Interior rated 'Graphic Stick'. Designed for the circular economy. Suited to a multitude of applications from museum and gallery, retail, heritage, private residential and commercial.
- Surface wall mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting

- SW = Surface Wall Mounted

Arm Length

- 6 = 6" (152.4mm)
- 12 = 12" (304.8mm)
- 19 = 19" (482.6mm)
- XX = Specify custom length to the nearest 0.25" (6.4mm), 19.7" (500mm) max

Power¹

- 12 = 12W (1590lm initial at 350mA, 36.3Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- WW = Wall Wash (66° x 41°)

Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Accessories³

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

Remote Driver⁴

- ECO30W-350 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-350 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures (1 per output)
- SOLO100W-350 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures (1 per output)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
 2. See photometric data sheet for delivered lumens.
 3. Holds up to two accessories. See page 4 for details.
 4. See driver information for details.

Ordering Information									
Model	Mounting	Arm Length	Power ¹	CRI/CCT ²	Optic	Finish	Accessories ³	+	Driver ⁴
MS-ZTA.50 G-Stick	SW		12		WW				
MS-ZTA.50 G-Stick	SW	6 12 19 XX	12	927 930 935 940	WW	W BL CF	CL DL HCL SOL SHS SOS		ECO30W-350 SOLO50W-350 SOLO100W-350

