

# 1.5" ProTools Wall Wash

## Round Recessed

inter•lux



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

### Ordering Information

WG-40RPTWW		M	92			RWW	WWL	WW			
Model	Fixation	Power <sup>2</sup>	CRI	CCT <sup>3</sup>	Driver <sup>4,5</sup>	Cover	Lens	Beam	Trim Finish	Housing <sup>5</sup>	Options
WG-40RPTWW	RBT RPT RTTBT <sup>1</sup>	M	92	27 30 35 40 WD	S010* D010* SPH* PEQ0* D2S* X	RWW	WWL	WW	W (std) B S F	LP NC IC CP X	WL TM EM AWNRF

\*Add 'R' for remote driver, ex. 'RS010'

### Luminaire

- Part of a complete family of 1.5" aperture matching downlights.
- 1.6" round aperture recessed downlight with 1.4" half moon light aperture.
- Efficacy up to 47 lumens per watt (delivered).
- CREE 3-step MacAdam LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Static White 33,300 hours. Warm Dim 55,000 hours.
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1.25".
- Housings available (see housings page).
- 5-year warranty.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- RTTBT = Rectangular Twin Trim with Bezel Trim<sup>1</sup>

### Power<sup>2</sup>

- M = Mid Power, 9.1W @ 500mA

### CRI

- 92 = 92 CRI

### CCT<sup>3</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

### Integral Driver NC / IC / CP Housings

#### Accessible Ceiling<sup>4,5</sup>

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

### Remote Driver for NC / LP / IC / CP<sup>4,5</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

### Cover

- RWW = Round Wall Wash

### Lens

- WWL = Wall Wash Spread Lens

### Beam

- WW = Wall Wash

### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code


### Housing (optional)<sup>5</sup>

- LP = Landing Pan (for remote driver)
- NC = New Construction Housing (integral driver for accessible ceilings only)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing

### Options


- WL = Wet location
- TM = Thin Metal Ceiling Clip
- EM = Emergency (remote only)
- AWNRf = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. TT Twin Trim will be provided with (2) matching fixtures, unless specified otherwise.
2. Wattage shown does not include power supplies / drivers.
3. See photometric data sheet for delivered lumens.
4. See driver information for details.
5. See housings pages for details.

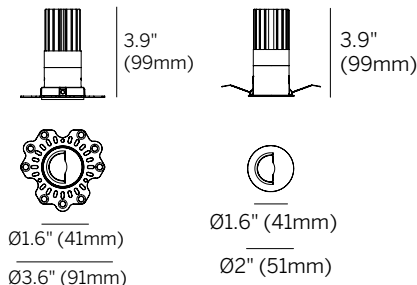

Plaster Trim (RPT)  
Cutout: Ø2.1" (54mm)

Bezel Trim (RBT)  
Cutout: Ø1.8" (45mm)

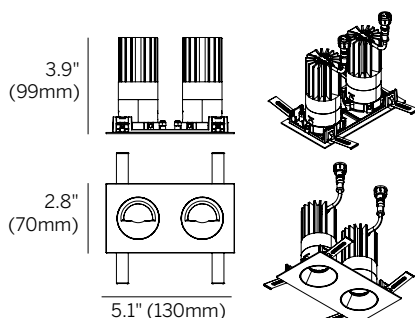

Rectangular Twin Trim with Bezel Trim (RTTBT)  
Cutout: 1.4" x 4.7" (60 x 120mm)