

1.5" ProTools Wall Wash


Square Recessed

inter•lux

WG-40SPTWW-...-SWW-WWL-WW-W

Delivered Lumens


		POWER
		M [9.1W]
CRI-CCT ¹	92-27	380
	92-30	398
	92-35	416
	92-40	428
	92-WD	371



Beam Angle (0-180) = 26.9
Beam Angle (90-270) = 33.0

ISOILLUMINANCE DIAGRAM - MID POWER 3500K

WG-40SPTWW-...-M-92-35-...-SWW-WWL-WW-W^{1,2}

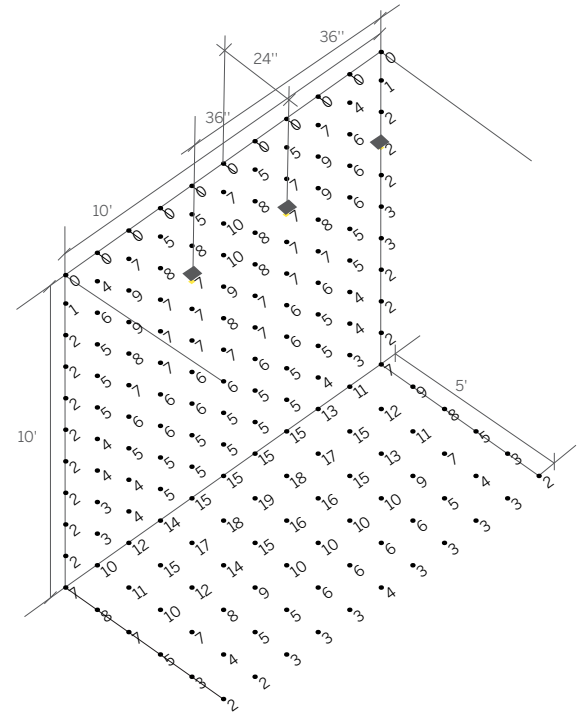

CRI-CCT MULTIPLIER				
92-27	92-30	92-35	92-40	92-WD
0.91	0.96	1.00	1.03	0.89

- 1 Polar Plot and Cone of Light are applicable to part number noted; use Multiplier table(s) to approximate other CRI-CCT and Power options.
- 2 Beam Diameter indicates on center spacing required to maintain Illuminance at Mounting Height.

whitegoods

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.

