
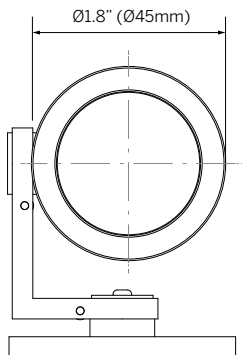


Frog Type X Zoom

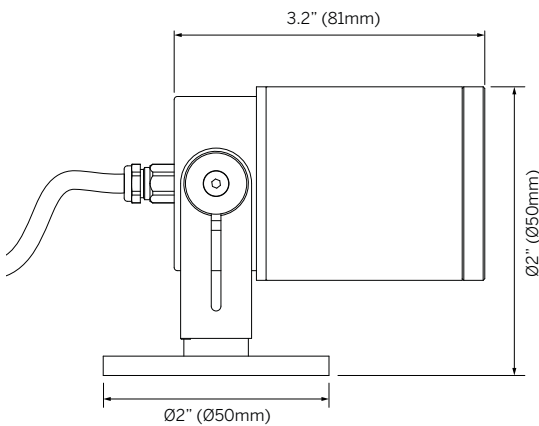

Luminaire

- IP66 rated spot light with zoomable lens.
- Adjustable and lockable spot light with adjustable beam for illuminating exterior landscapes and highlighting growing shrubbery and trees.
- Surface mounted, ground spike or tree strap.
- Precision machined from 70 - 90% recycled aluminum.
- 16.6° - 44.3° and 20.7° - 43.6° optics available.
- LED 95+ CRI, multiple CCTs available.
- 5 Year warranty.

Mounting

- SF = Surface mount
- GS = Ground Spike
- TS = Tree strap

Power¹

- M = Mid Power, 7.9W (798lm initial at 250mA, 34.1Vf)
- H = High Power, 11.9W (1513lm initial at 350mA, 36.9Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- ZA = Zoom / adjustable

Beam

- 16-44 = 16.6° - 44.3°
- 20-43 = 20.7° - 43.6°

Finish

- CA = Clear anodized
- BL = Matte black
- CF = Custom finish, specify RAL

Remote Driver³

(Mid Power 7.9W @ 250mA)

- ECO30W-250 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-250 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures
- SOLO100W-250 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

(High Power 11.9W @ 350mA)

- ECO30W-350 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-350 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures
- SOLO100W-350 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
 2. See photometric data sheet for delivered lumens.
 3. See driver information for details.

Ordering Information

Model	Mounting	Power ¹	CRI/CCT ²	Optic	Beam	Finish	+	Driver ³
MS-FXZ				ZA				
MS-FXZ	SF GS TS	M H	927 930 935 940	ZA	16-44 20-43	CA BL CF	+	ECO30W-XXX SOLO50W-XXX SOLO100W-XXX