


## EVOLUTION CEILING

Housing: Ceiling Light with Click-lock, solid Aluminum housing.  
Design: Ulrich Sattler

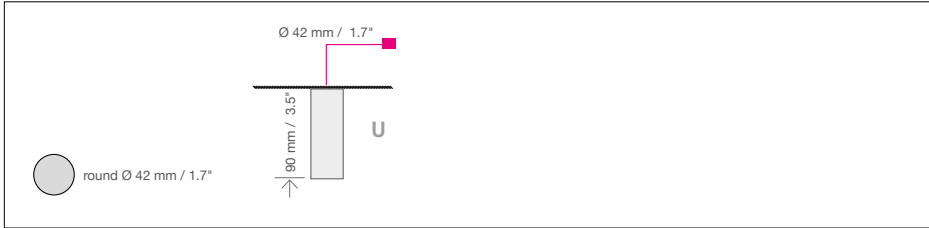

Size	Size: Ø / H mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight kg/lbs <sup>2</sup>	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version	
	Ø 42 / H 90 mm	Ø 1.7 / L 3.5"	6.3	858	0.4 / 0.88	24°	<b>1776.</b>	x x.	x x.	x x.	x x.	x x x.	x	
	Ø 42 / H 90 mm	Ø 1.7 / L 3.5"	6.3	858	0.4 / 0.88	38°	<b>1777.</b>	x x.	x x.	x x.	x x.	x x x.	x	
<b>LED</b> Constant Current 200mA  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		<b>Standard:</b> Warm-white	3000 K				x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x	
		<b>Optional:</b>	Natural-white	3500 K				x x x.	<b>35.</b>	x x.	x x.	x x.	x x x.	x
			Neutral-white	4000 K				x x x.	<b>40.</b>	x x.	x x.	x x.	x x x.	x
			Extra warm-white	2700 K				x x x.	<b>27.</b>	x x.	x x.	x x.	x x x.	x
<b>Dimming</b>		<b>Standard:</b> 0-10V				x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x		
<b>Finish</b>		<b>Standard:</b> 66 bronze anodized brushed	<b>Optional:</b> 60 silver anodized brushed	62 black anodized brushed	65 champ. gold anodized brushed	12 white, powder coated, similar to RAL 9003	x x x.	x x.	x x.	x x.	---	x x x.	x	
<b>Mounting version</b>		Installation in ceiling, connection via 59" / 1.5 m cable to power supply unit, this is inserted separately into ceiling via inspection opening.						x x x.	x x.	x x.	x x.	x x.	x x x.	<b>U.</b>

**Remote driver required ordered separately:**

Type / Size mm / inch  
L x W x H

**0-10V: ECO30W-200 13.25" x 5" x 2.25"**

Complete order number: --- . --- . --- . **00.** --- . **000.** **U.**

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**