

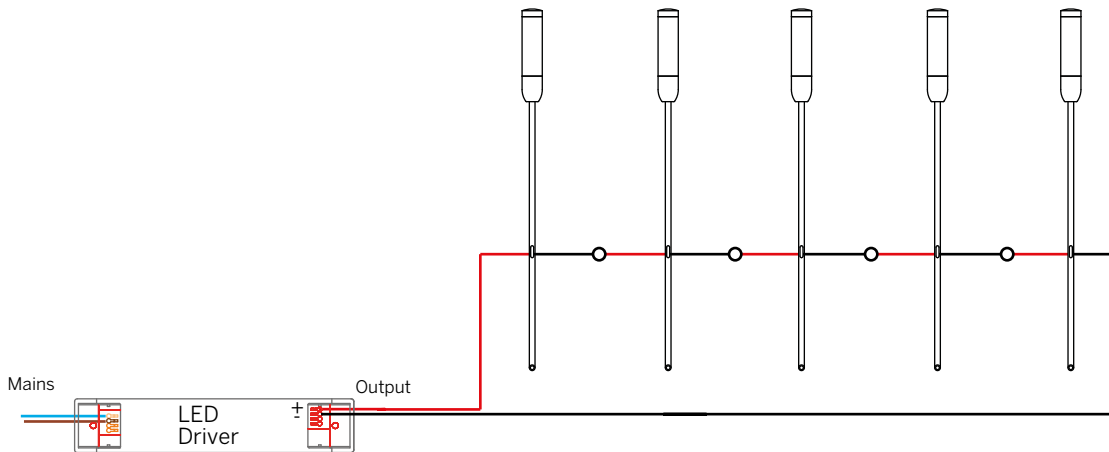


Photometry

Fitting	Polar diagram	LED	Supply	Power	Delivered output
 <p>Diffused acrylic</p>	 <p>343.2°</p>	95 CRI, 3000K	Constant Current 700mA	2W	109lm

Wiring

Series Wiring



Note that while constant current light sources can be wired in series, the number of fittings that can be wired in series is limited by the forward voltage and wattage of the LED.

Each Bulrush is supplied with 1 x Star LEDs which have a total forward voltage of 2.9V and wattage of 2W when driven at 700mA.

IP68 connectors recommended. Driver specified separately.