


# Vole Type X

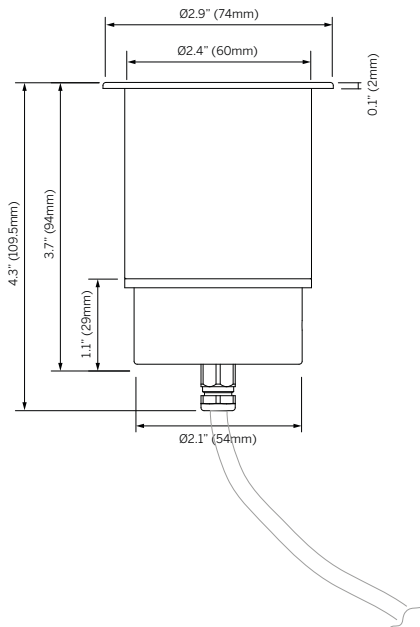

### Luminaire

- IP66 rated ground recessed uplight.
- Recessed mounted.
- Precision machined from 70 - 90% recycled aluminum.
- Multiple optics.
- LED 95+ CRI, multiple CCTs available.

### Mounting

- RC = Recessed

### Power<sup>1</sup>

- 8 = 8W (1020lm initial at 250mA, 36.6Vf)

### CCT (95+ CRI)<sup>2</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

### Optic

- N = Narrow (19°)
- M = Medium (26°)
- F = Flood (35°)
- WF = Wide Flood (53°)

### Finish

- CA = Clear Anodized
- CB = Classic Bronze 34
- BA = Black Anodized
- CF = Custom finish, specify RAL









### Remote Driver<sup>3</sup>

- ECO30W-250 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-250 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures
- SOLO100W-250 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

1. Wattage shown is for LED only, system wattage varies depending on driver selected.  
 2. See photometric data sheet for delivered lumens.  
 3. See driver information for details.

Ordering Information						
Model	Mounting	Power <sup>1</sup>	CRI/CCT <sup>2</sup>	Optic	Finish	Driver <sup>1</sup>
MS-VTX	RC	8				
MS-VTX	RC	8	927 930 935 940	N M F WF	CA CB BA CF	ECO30W-250 SOLO50W-250 SOLO100W-250

## Photometry

Fitting	Polar diagram	LED	Supply	Power	Delivered output
 <p>9.8mm XOB LED Narrow</p>	 <p>19.2°</p> <p>99.9% light in 180° cone 766 lm @ 180° = 1 lm @ 180° = Total 766 lm 130 (EU Energy efficiency index) 0.12</p>	95 CRI, 3000K	Constant Current 250mA	8.4W	764lm
 <p>9.8mm XOB LED Medium</p>	 <p>26°</p> <p>99.9% light in 180° cone 714 lm @ 180° = 1 lm @ 180° = Total 715 lm 130 (EU Energy efficiency index) 0.12</p>	95 CRI, 3000K	Constant Current 250mA	8.4W	713lm
 <p>9.8mm XOB LED Flood</p>	 <p>34.6°</p> <p>99.9% light in 180° cone 714 lm @ 180° = 1 lm @ 180° = Total 715 lm 130 (EU Energy efficiency index) 0.12</p>	95 CRI, 3000K	Constant Current 250mA	8.4W	703lm
 <p>9.8mm XOB LED Wide Flood</p>	 <p>53.1°</p> <p>99.9% light in 180° cone 718 lm @ 180° = 2 lm @ 180° = Total 720 lm 130 (EU Energy efficiency index) 0.12</p>	95 CRI, 3000K	Constant Current 250mA	8.4W	704lm

## Wiring

