


# Vole Type X

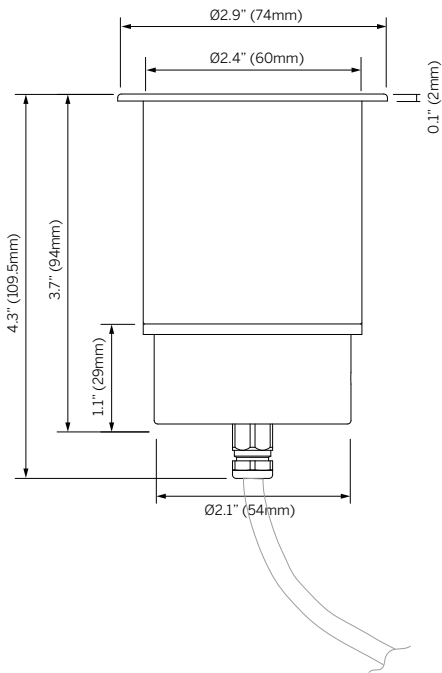

### Luminaire

- IP66 rated ground recessed uplight.
- Recessed mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

### Mounting

- RC = Recessed Mounted

### Power<sup>1</sup>

- 8 = 8W (1020lm initial at 250mA, 36.6Vf)

### CCT (95+ CRI)<sup>2</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

### Optic

- N = Narrow (19°)
- M = Medium (26°)
- F = Flood (35°)
- WF = Wide Flood (53°)

### Finish

- CA = Clear Anodized
- CB = Classic Bronze 34
- BA = Black Anodized
- CF = Custom finish, specify RAL

### Remote Driver<sup>4</sup>

- ECO30W-500 = 0-10V EldoLED ECOdrive 30W for 1 fixture
- SOLO50W-500 = 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures
- SOLO100W-500 = 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

1. Wattage shown is for LED only, system wattage varies depending on driver selected.  
 2. See photometric data sheet for delivered lumens.  
 3. See driver information for details.

### Ordering Information

Model	Mounting	Power <sup>1</sup>	CRI/ CCT <sup>2</sup>	Optic	Finish	+	Driver <sup>3</sup>
MS-VTX	RC	8					
MS-VTX	RC	8	927 930 935 940	N M F WF	CA CB BA CF		ECO30W-500 SOLO50W-500 SOLO100W-500

