


Surf Type S

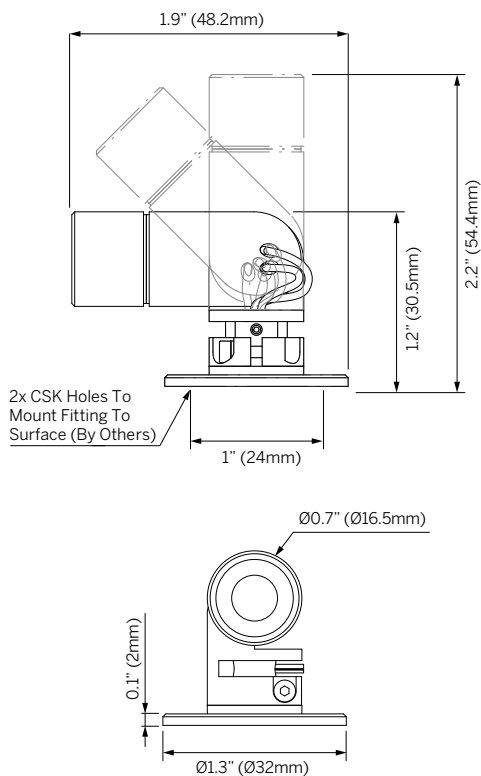

Luminaire

- Interior rated spot light with interchangeable optics. Adjustable and lockable miniature surface mount luminaire for museum showcase lighting, retail, hospitality and other close work applications.
- Surface mounted.
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting

- SM = Surface Mounted

Power¹

- 1.4 = 1.4W (137lm initial at 500mA, 2.85Vf)

CCT (95+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- VN = Very Narrow (13°)³
- N = Narrow (16°)
- M = Medium (25°)
- F = Flood (40°)
- WF = Wide Flood (47°)
- E = Elliptical (26° x 39°)

Finish (interior always black)

- CA = Clear Anodized
- W = Pure White, RAL9010
- BA = Black Anodized
- CF = Custom finish, specify RAL

Remote Driver⁴

- ECO30W-500 = 0-10V EldoLED ECOdrive 30W for 1-10 fixtures
- SOLO50W-500 = 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures
- SOLO100W-500 = 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See page 3 for details.
4. See driver information for details.

Ordering Information						
MS-ST5	SM	1.4				
Model	Mounting	Power ¹	CRI/ CCT ²	Optic	Finish	+ Driver ⁴
MS-ST5	SM	1.4	927 930 935 940	VN ³ N M F WF E	CA W BA CF	ECO30W-500 SOLO50W-500 SOLO100W-500

