


ZTA.35 Mains Track +Zoom

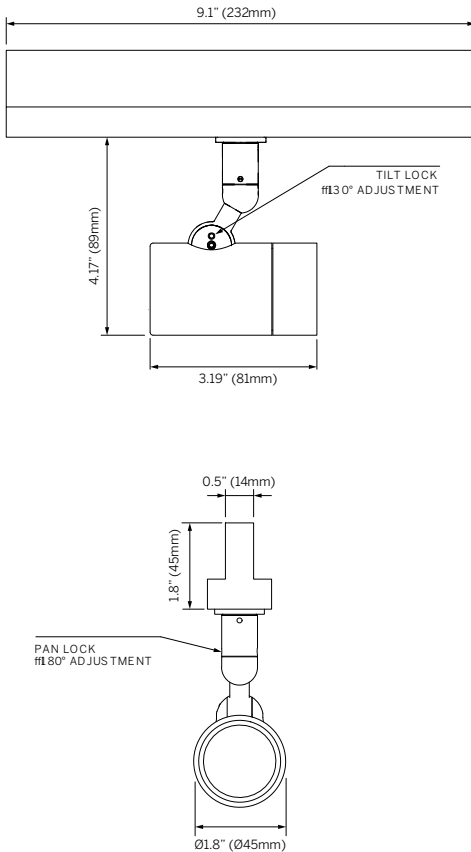

Luminaire

- Interior rated track spot light with zoomable lens or fixed focus.
- Track mounted (Stucchi Onetrack UL 120V 3 Circuits Common Neutral).
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.

Mounting¹

- TR = Stucchi Onetrack UL 120V 3 Circuits Common Neutral

Power²

- 4 = 4W (385lm initial at 450mA, 9.4Vf)
- 8 = 8W (798lm initial at 250mA, 34.1Vf)

CCT (95+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- N1 = Narrow 1 (14°), 4W Only
- N2 = Narrow 2 (18°), 8W Only
- M = Medium (23°), 8W Only
- F = Flood (35°), 8W Only
- WF = Wide Flood (55°), 8W Only
- Z = Zoom (22° - 45°), 8W Only

Finish (fixture and track adapter) (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

Accessories⁴

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

Controls (Dimming)⁵

- O10 = 0-10V
- DL = DALI
- W = Wireless (Casambi or Xicato)
- MD = Manual on-board dim
- PC = Phase cut

- Order track separately. See Stucchi Onetrack data sheet for details.
- Wattage shown is for LED only, system wattage varies depending on driver selected.
- See photometric data sheet for delivered lumens.
- Holds up to two accessories. See page 7 for details.
- Do not load driver beyond 76.8W. See driver information for details. Additional drivers available. contact factory.

Ordering Information

Model	Mounting ¹	Power ²	CRI/CCT ³	Optic	Finish	Accessories ⁴	+	Controls			
MS-ZTA35MT	TR	4	927 930 935 940	N1	W BL CF	CL DL HCL SOL SHS SOS	+	O10 DL W MD PC			
		8		N2 M F WF							
MS-ZTA35MTZ (Zoom)		8			Z						

