

**General:** The Skin family of lighting fixtures is aimed to provide flexibility in illuminating most applications. From wall washing to evenly illuminating architectural curves like columns and curved walls, you will find a Skin for any need. Available as Ceiling, Wall and In-ground, with possibility to Surface, Recessed or Semi-Recessed mounting. With multiple beam spreads and an attention to how optical elements interact with the surrounding environment, Skin will draw attention to what matters the most while fully blending into the space.

**Fixture Body:** Open pore Anodized and Powder Coated Die-Cast Aluminum.

**Diffuser:** Extra-clear tempered glass and UV resistant Polycarbonate.

**Mounting:** Stainless Steel bracket for Surface mount.

**Dimensions/Weight:** 8.3" (3.63 lbs)

**Driver:** Integral. 120-277VAC, 0-10V Dimmable.

**Wattages:** 11W (8.3" Single) – 22W (8.3" Dual)

**Cable:** Fixture comes with 11.8" of power cable.

**Safety features:** Fixture is equipped with Electrostatic discharge protection and Surge Protection.

**IP rating:** IP65 for protection against dust and water jets from any angle.

**IK rating:** IK 06

**ETL Certification:** ETL, wet location

**Optics:** Fixed, Asymmetric Wall Washer.

**Color temperatures:** 2700K – 3000K – 4000K.

**CRI:** 80+

**Lumen Maintenance:** L70 projections tested at Tj 65° C and Ta 25°.

**Warranty:** 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

## Contents

- 2 product configurator
- 2 diagrams
- 3 photometry

### Single 8.3" (11W)



Up



Down

### Dual 8.3" (22W)




Up



Down

## ASYMMETRY MAKES THE DIFFERENCE

In the version with upright asymmetrical optics, the beam is more open, allowing a greater light diffusion on the ceiling, an effect that is amplified in vaulted rooms; in the downlight version, the beam is narrower and the recessed optics maximise visual comfort, also thanks to the recessed cell optics.

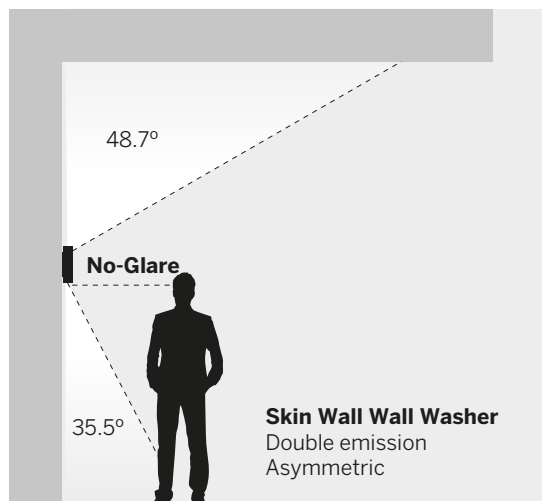

Delivered Lumens*	Single 8.3" [11W]	Dual 8.3" [22W]
AS	942	1722 (861+861)

\*Values shown for 3000K


## SINGLE EMISSION

Ordering Information						
Product	Trim/Finish	Type	Diameter	Wattage/Operation	Color Temp	Optic
SKI = Skin	WWH = Wall White WBL = Wall Black WBG = Wall Black Gray WGR = Wall Gray WDB = Wall Dark Brown	SAS = Single Asymmetric	8 = 8.3"	11 ID = 11W / Integral 120/277VAC (0-10V dim)	27 = 2700K 30 = 3000K 40 = 4000K	AS = Asymmetric

## DUAL EMISSION

Ordering Information						
Product	Trim/Finish	Type	Diameter	Wattage/Operation	Color Temp	Optic
SKI = Skin	WWH = Wall White WBL = Wall Black WBG = Wall Black Gray WGR = Wall Gray WDB = Wall Dark Brown	DAS = Dual Asymmetric	8 = 8.3"	22 ID = 22W / Integral 120/277VAC (0-10V dim)	27 = 2700K 30 = 3000K 40 = 4000K	AS = Asymmetric

### Single Emission 8.3" 11W ID



### Dual Emission 8.3" 22W ID

