

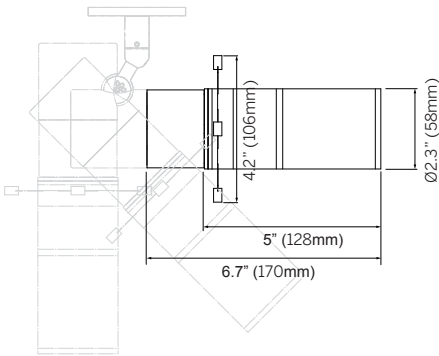


ZTA.50 Mains Track Framer

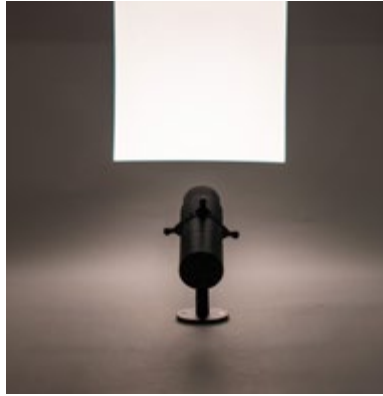

Adjustable Beam (17-33.4°)

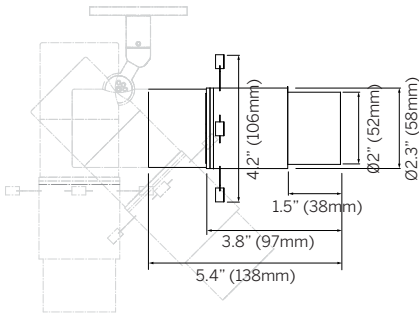

Fixed Beam (53°)

Luminaire

- Interior rated track spot light with fixed or adjustable framer.
- Track mounted (Stucchi Onetrack UL 120V 3 Circuits Common Neutral).
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.
- Fixture includes 0-10V dimming, driver remote.

Mounting¹

- TR = Stucchi Onetrack UL 120V 3 Circuits Common Neutral

Power²

- 12 = 12W (1513lm initial at 350mA, 36.9Vf)

CCT (95+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- 17-33 = Adjustable 17-33°
- 53 = Fixed 53°

Finish (interior always matte black)

- W = Pure White, RAL9010
- BL = Matte Black
- CF = Custom finish, specify RAL

Options

- GBS = Gobo Single Color
- GBD = Gobo Double Color

Controls (Dimming)⁴

- O10 = 0-10V
- DL = DALI
- W = Wireless (Casambi or Xicato)
- MD = Manual on-board dim
- PC = Phase cut

1. Order track separately. See Stucchi Onetrack data sheet for details.
2. Wattage shown is for LED only, system wattage varies depending on driver selected.
3. See photometric data sheet for delivered lumens.
4. Do not load driver beyond 76.8W. See driver information for details. Additional drivers available. contact factory.

Ordering Information

Model	Mounting	Power ²	CRI/ CCT ³	Optic	Finish	Options	+	Driver ⁴
MS-ZTA50FR	TR	12	927 930 935 940	17-33 53	W BL CF	GBS GBD		O10 DL W MD PC

